


Wall mounted unit

FTXA-BS + RXA-A9 / RXA-B / RXA-B9



BLUEEVOLUTION stylish

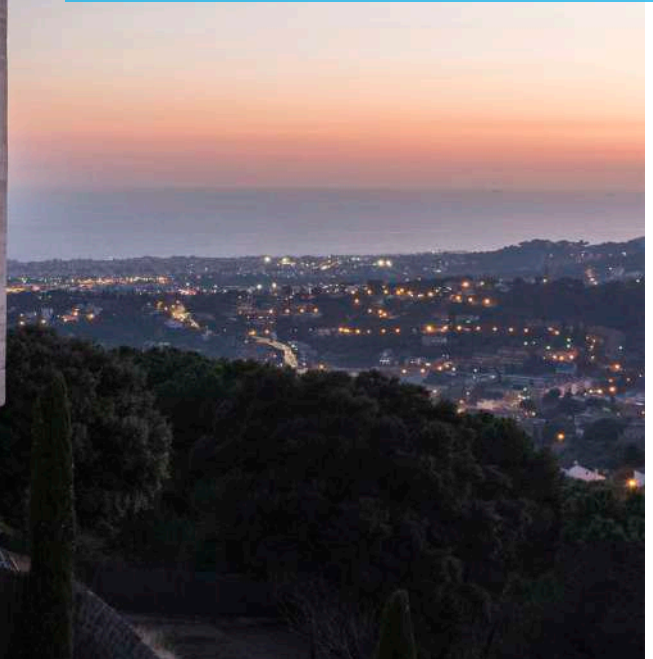

Coanda effect - cooling



Coanda effect - heating



Intelligent thermal sensor



Multi model application

Where innovation meets creativity

- › Compact design in silver
- › Perfect temperature distribution thanks to Coanda effect
- › Intelligent thermal sensor: air flow is adjusted when detecting temperature differences
- › Oh so quiet
- › Daikin Flash Streamer technology: powerful air purification
- › Onecta app
- › Voice control
- › Bluevolution range: lower environmental impact
- › Seasonal efficiency values up to A+++ in cooling and heating

FTXA-BS + RXA-A9 / RXA-B / RXA-B9



Indoor unit			FTXA	20BS	25BS	35BS	42BS	50BS	
Dimensions	Unit	HeightxWidthxDepth	mm	295 x798 x189					
Weight	Unit		kg	11.5					
Air filter	Type			Removable / washable					
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/ High	m ³ /min	4.6 / 6.1 / 8.2 / 11.0	4.6 / 6.1 / 8.6 / 11.5	4.6 / 6.1 / 8.6 / 11.9	4.6 / 7.2 / 9.8 / 13.1	5.2 / 7.6 / 10.4 / 13.5
		Heating	Silent operation / Low / Medium / High	m ³ /min	4.5 / 6.4 / 8.7 / 10.9	4.5 / 6.4 / 9.0 / 11.1	4.5 / 6.4 / 9.0 / 11.5	5.2 / 7.7 / 10.5 / 14.6	5.7 / 8.2 / 11.1 / 15.1
Sound power level	Cooling		dB(A)	57			60		
Sound pressure level	Cooling	Silent operation/Low/High	dB(A)	19 / 25 / 39	19 / 25 / 40	19 / 25 / 41	21 / 29 / 45	24 / 31 / 46	
	Heating	Silent operation/Low/High	dB(A)	19 / 25 / 39	19 / 25 / 40	19 / 25 / 41	21 / 29 / 45	24 / 33 / 46	
Control systems	Infrared remote control			ARC466A58					
	Wired remote control			BRC073					

Outdoor unit			RXA/RXA/RXA	20A9	25A9	35A9	42B9	50B
Dimensions	Unit	HeightxWidthxDepth	mm	550 x840 x350			734 x954 x401	
Weight	Unit		kg	32			49	
Sound power level	Cooling	Nom.	dB(A)	59.0			62.0	
	Heating	Nom.	dB(A)	59.0			62.0	
Sound pressure level	Cooling	Nom.	dB(A)	46.0			48.0	
	Heating	Nom.	dB(A)	47.0			48.0	
Operation range	Cooling	Ambient Min.~Max.	°CDB				-10 ~46	
	Heating	Ambient Min.~Max.	°CWB				-15 ~18	
Refrigerant	Type			R-32				
	GWP			675.0			675	
	Charge		kg/TCO ₂ Eq	0.76 / 0.52			1.10 / 0.75	
Piping connections	Liquid	OD	mm	6.35			6.4	
	Gas	OD	mm	9.50			9.5	12.7
	Piping length	OU - IU Max.	m	20			30	
	Additional refrigerant charge		kg/m	0.02 (for piping length exceeding 10m)				
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /220-240			20	
	Current - 50Hz	Maximum fuse amps (MFA)	A	10				13

Contains fluorinated greenhouse gases | See separate drawing for operation range | See separate drawing for electrical data

Efficiency data			FTXA + RXA	20BS + 20A9	25BS + 25A9	35BS + 35A9	42BS + 42B9	50BS + 50B
Cooling capacity	Min./Nom./Max.		kW	1.30 / 2.00 / 2.60	1.30 / 2.50 / 3.20	1.40 / 3.40 / 4.00	1.70 / 4.20 / 5.00	1.70 / 5.00 / 5.30
Heating capacity	Min./Nom./Max.		kW	1.30 / 2.50 / 3.50	1.30 / 2.80 / 4.70	1.40 / 4.00 / 5.20	1.70 / 5.40 / 6.00	1.70 / 5.80 / 6.50
Power input	Cooling	Min./Nom./Max.	kW	0.27 / 0.43 / 0.63	0.27 / 0.56 / 0.78	0.31 / 0.78 / 1.04	-1.05 / -	-1.36 / -
	Heating	Min./Nom./Max.	kW	0.25 / 0.50 / 0.91	0.25 / 0.56 / 1.22	0.26 / 0.99 / 1.67	-1.31 / -	-1.45 / -
Space cooling	Energy efficiency class			A+++			A++	
	Capacity	Pdesign	kW	2.00	2.50	3.40	4.20	5.00
	SEER			8.75	8.74	8.73	7.50	7.33
	Annual energy consumption		kWh/a	80	100	136	196	239
Space heating (Average climate)	Energy efficiency class			A+++			A++	
	Capacity	Pdesign	kW	2.40	2.45	2.50	3.80	4.00
	SCOP/A			5.15			4.60	
	Annual energy consumption		kWh/a	653	666	680	1,156	1,218
Nominal efficiency	EER			4.70	4.46	4.37	3.99	3.68
	COP			5.00			4.12	4.00
	Annual energy consumption		kWh	-			526	679
Energy labeling Directive Cooling/Heating				A/A				

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for operation range

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · BE 0412 120 336 (Responsible Editor)



Daikin Europe N.V. participates in the ECP programmes for Fan Coil Units and Variable Refrigerant Flow systems. Daikin Applied Europe S.p.A. participates in the ECP programmes for Liquid Chilling Packages and Hydronic Heat Pumps. Check ongoing validity of certificate: www.eurovent-certification.com

ECPEN23-051

04/2023

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. / Daikin Central Europe HandelsGmbH. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH have compiled the content of this publication to the best of their knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

